



## Q Acoustics 3000 Series Specifications

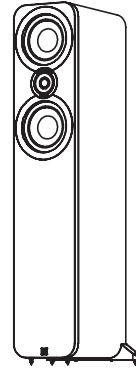

### Passive Loudspeakers

	<b>3010</b>	<b>3020</b>	<b>3050</b>	<b>3090C</b>
Enclosure type:	2-way reflex	2-way reflex	2-way reflex	2-way reflex
Bass unit (mm):	100 mm	125 mm	2 x 165 mm	2 x 100 mm
Treble unit (mm):	25 mm	25 mm	25 mm	25 mm
Frequency response (+/-3dB):	68 Hz - 22 kHz	64 Hz - 22 kHz	44 Hz - 22 kHz	75 Hz - 22 kHz
Nominal impedance:	6 $\Omega$	6 $\Omega$	6 $\Omega$	6 $\Omega$
Sensitivity (2.83v@1m):	86dB	88dB	92dB	89dB
Recommended amplifier power:	15 - 75W	25 - 75W	25 - 100W	25 - 100W
Crossover frequency:	2.8 kHz	2.9 kHz	2.6 kHz	2.7 kHz
Effective volume:	3.8 litres	5.9 litres	35.6 litres	10.3 litres
Cabinet dimensions (WxHxD mm):	150 x 235 x 200	170 x 260 x 226	200 x 1000 x 298	430 x 150 x 200
Weight (per cabinet):	3.6 Kg	4.6 Kg	17.8 Kg	6.0 Kg



### Active Subwoofer

#### **3070S**

Enclosure type:	Ported
Bass unit (mm):	2 x 165 mm long throw
Amplifier power:	140W rms
Crossover frequency:	50 Hz - 150 Hz (var.)
Cabinet dimensions (WxHxD mm):	200 x 400 x 425
Weight:	13.6 Kg